



# SDR-IQ Window types, amplitude calibration and close in spurious

G4JNT June 2011


Input single carrier at -30dBm 4096 Point FFT (bin size 48Hz)

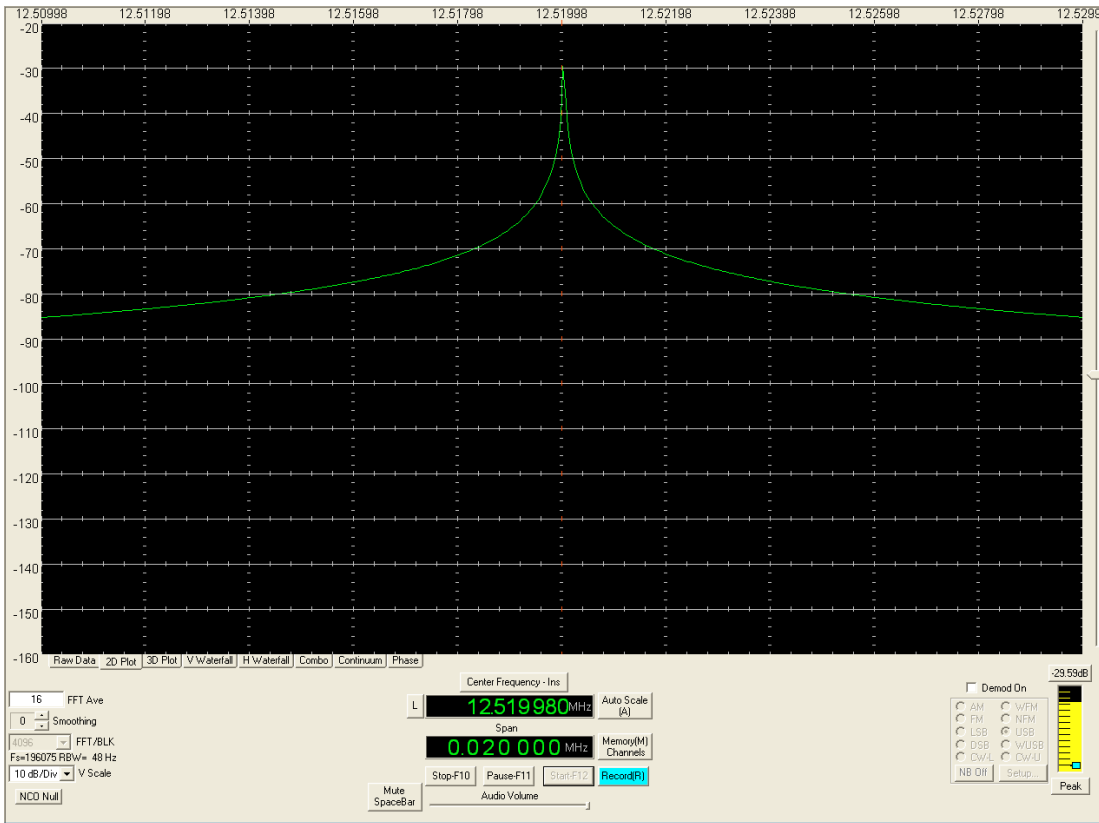


Rectangle

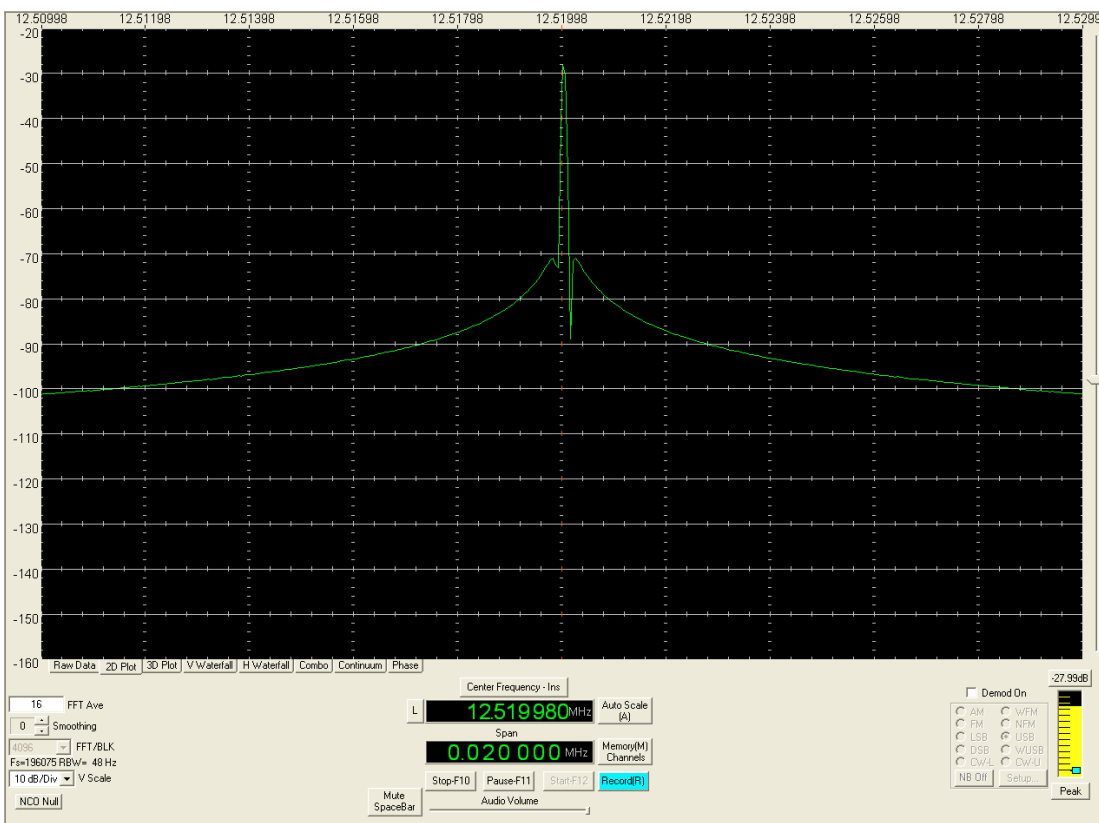


Hamming

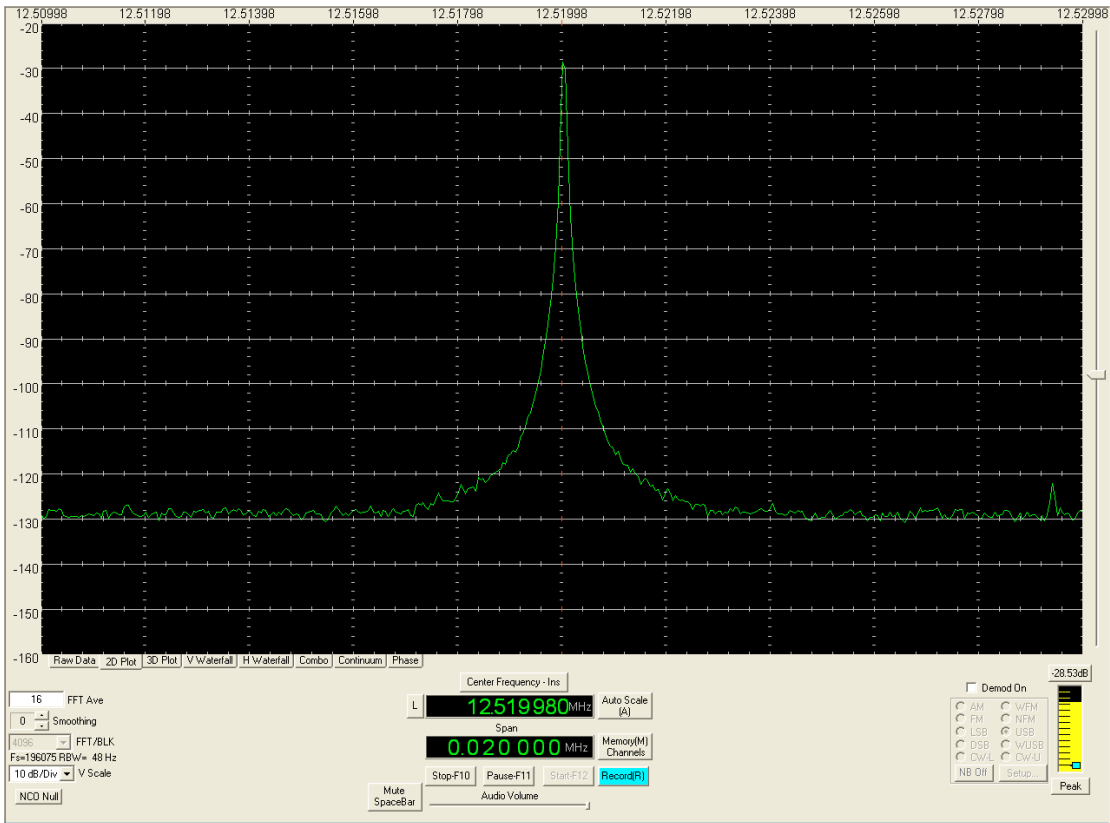


Hanning

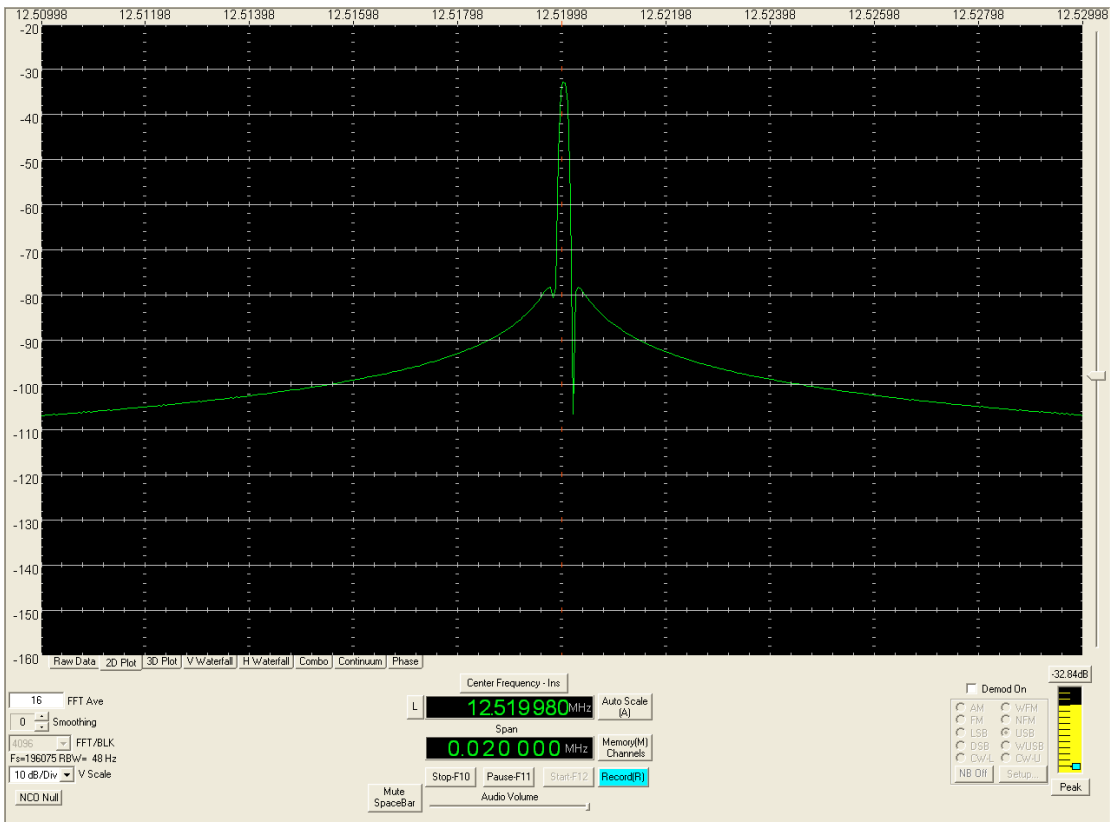

FlatTop

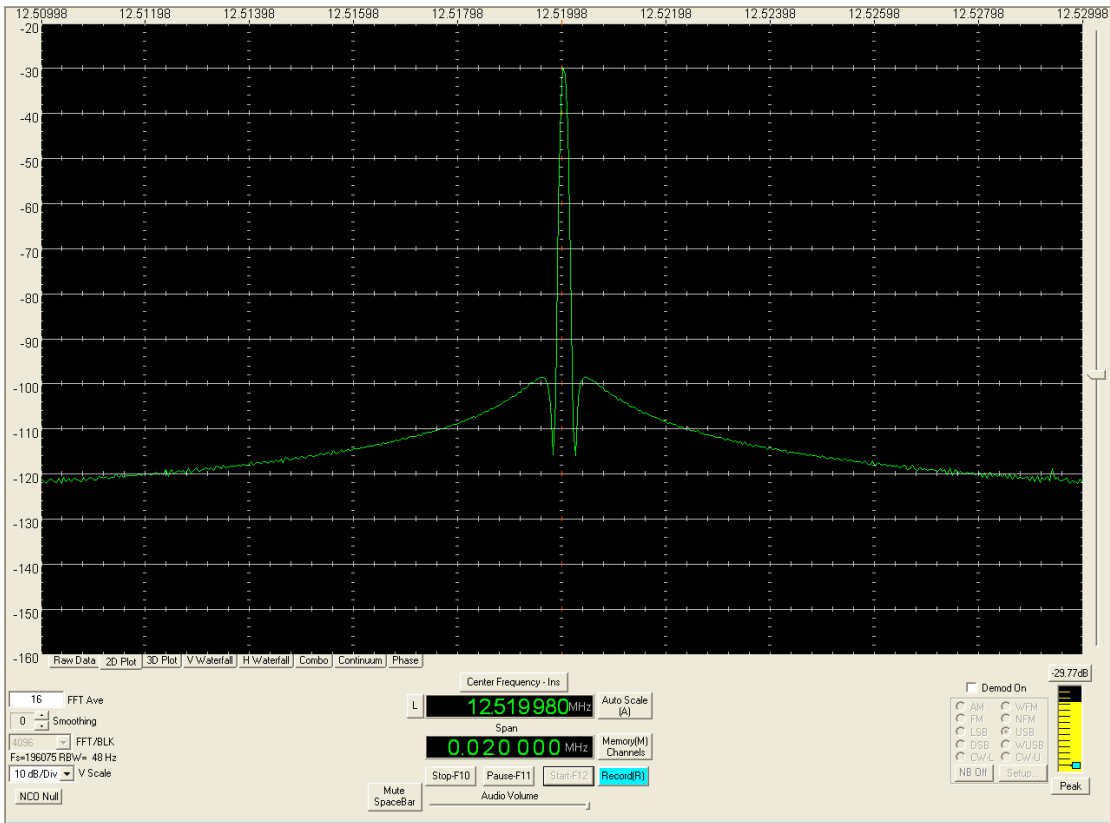

Blackman

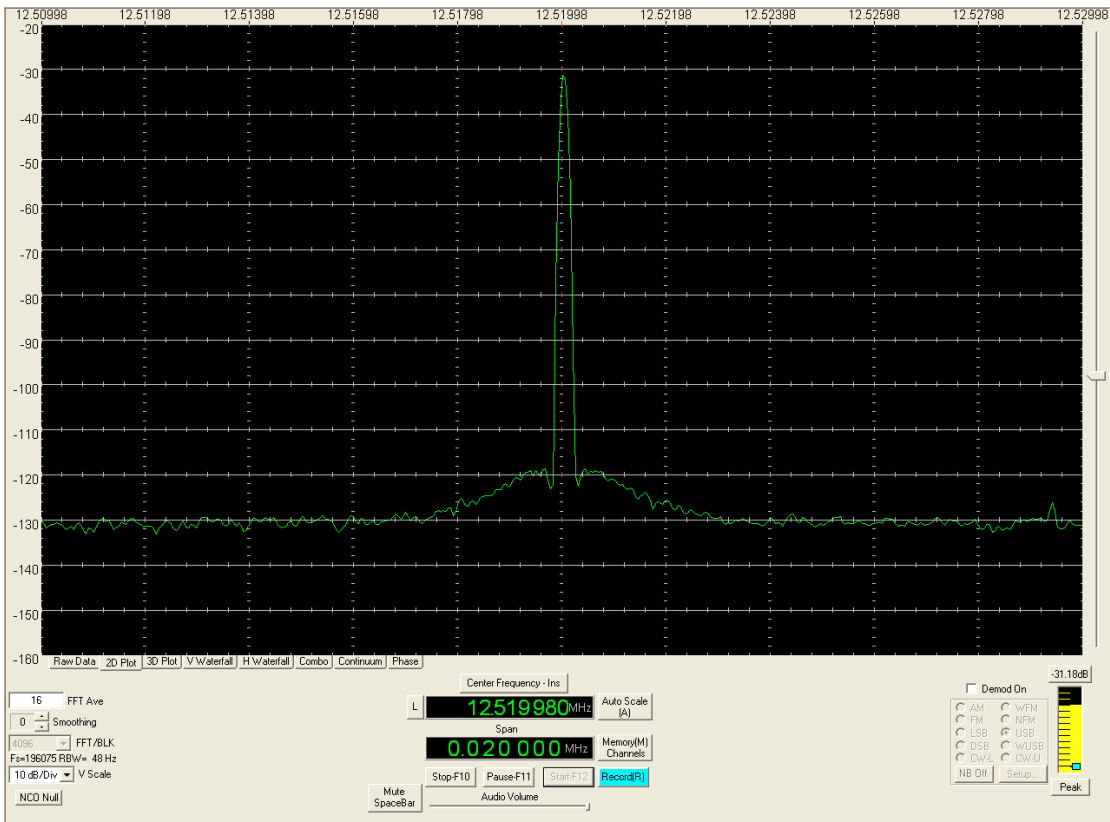

Blackman harris